



SPECIFICATION

RATING:	15A 125VAC, 10A 250VAC (UL, CUL) 20A 125/250VAC (IN HOUSE TEST)
INSULATION RESISTANCE:	DC 500V 100MΩ OR MORE
CONTACT RESISTANCE:	DC 2-4V 1A 20mΩ OR LESS
WITHSTAND VOLTAGE:	AC 1500V FOR 1 Min
AMBIENT TEMPERATURE:	0~55°C
ELECTRICAL LIFE:	6,000 CYCLES

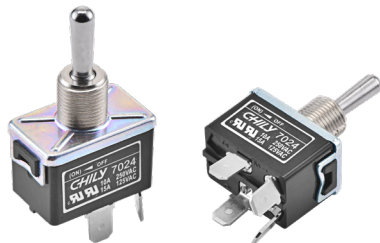

SIZE

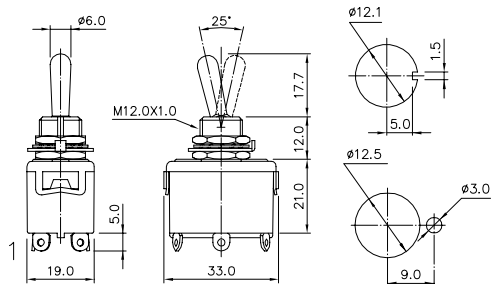

PANEL LAYOUT

HOW TO ORDER

702X — □ — □ — □ — □

SWITCH FUNCTION

7021 : ON-OFF
7022 : ON-ON
7023 : ON-OFF-ON
7024 : (ON)-OFF
7025 : ON-(ON)
7026 : (ON)-OFF-(ON)
7027 : ON-OFF-(ON)

SHAFT

K1:	K4:
K2:	K5:
K3:	

RATING

C1: 10A 250VAC 15A 125VAC	C2: 10A 250VAC 15A 125VAC	C3: 10A 250VAC 15A 125VAC
---------------------------------	---------------------------------	---------------------------------

TERMINAL

T1:	T6:
T2: 6.35x10.8	T11:
T3: 4.75x10.8	T12: 6.35x10.8
T4:	T14: