


SPECIFICATION

RATING:	15A 125VAC, 10A 250VAC (UL, CUL)
	20A 125/250VAC (IN HOUSE TEST)
INSULATION RESISTANCE:	DC 500V 100MΩ OR MORE
CONTACT RESISTANCE:	DC 2-4V 1A 20mΩ OR LESS
WITHSTAND VOLTAGE:	AC 1500V FOR 1 Min
AMBIENT TEMPERATURE:	0~55°C
ELECTRICAL LIFE:	6,000 CYCLES

SIZE

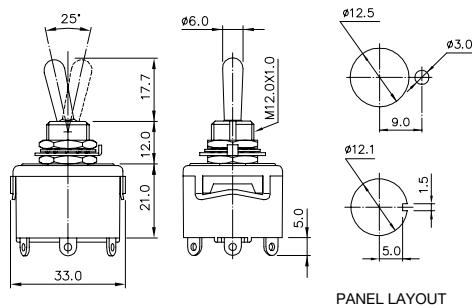


HOW TO ORDER

703X — ☐ — ☐ — ☐ — ☐

SWITCH FUNCTION

7031 : ON-OFF
7032 : ON-ON
7033 : ON-OFF-ON
7034 : (ON)-OFF
7035 : ON-(ON)
7036 : (ON)-OFF-(ON)
7037 : ON-OFF-(ON)

SHAFT



RATING

C1: 20A 250VAC 20A 125VAC
C1: 10A 250VAC 15A 125VAC
C2: 10A 250VAC 15A 125VAC
C3: 10A 250VAC 15A 125VAC

TERMINAL

T1: ø2.1 4.9	T6: ø4.0 6.5
T2: 6.35x0.8	T11: 1.6
T3: 4.75x0.8	T12: 6.35x0.8
T4: 6.5	T14: ø2.1 6.5