


SPECIFICATION



RATING:	16(6)A 250V~ T55 (ENEC)
INSULATION RESISTANCE:	DC 500V 100MΩ OR MORE
CONTACT RESISTANCE:	DC 2-4V 1A 20mΩ OR LESS
WITHSTAND VOLTAGE:	AC 1500V FOR 1 Min
AMBIENT TEMPERATURE:	0~55°C
ELECTRICAL LIFE:	10,000 CYCLES

SIZE

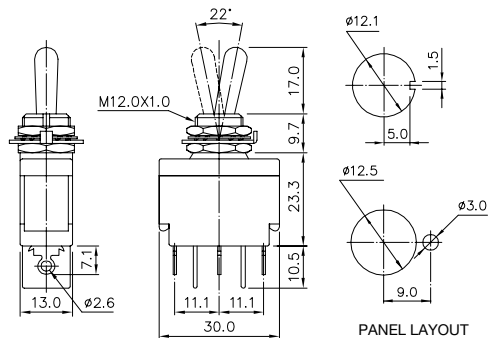

HOW TO ORDER

801X — □ — □ — □

SWITCH FUNCTION

8011	: ON-OFF
8012	: ON-ON
8013	: ON-OFF-ON

SHAFT

K1:		MATERIAL: PLASTICS
K2:		MATERIAL: METAL

TERMINAL

T1:		T2: 6.35x0.8
T3:		T3: M3.0x0.5