



SPECIFICATION



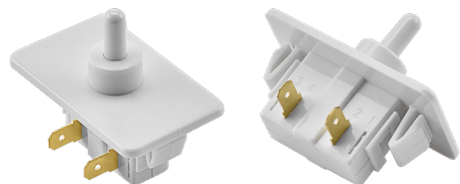


RATING:	2A 125VAC, 1A 250VAC
INSULATION RESISTANCE:	DC 500V 100MΩ OR MORE
CONTACT RESISTANCE:	DC 2-4V 1A 20mΩ OR LESS
WITHSTAND VOLTAGE:	AC 1500V FOR 1 Min
AMBIENT TEMPERATURE:	0~55°C
ELECTRICAL LIFE:	10,000 CYCLES

SIZE



A=FULL TRAVEL POSITION:7.0
 B=TERMINALS No.2 & No.4 AT "ON" POSITION:MIN. 14.0.5 ±0.5
 C=TERMINALS No.1 & No.3 AT "ON" POSITION:17.5 ±0.5
 * FREE POSITION:17.5 ±0.5



MOUNTING HOLE
(FOR REFERENCE)