





**8217
SERIES**

SPECIFICATION

RATING	: 10A 125/ 250VAC (UL,C-UL) 12(4)A 250V~ T85 (ENEC)
INSULATION RESISTANCE	: DC 500V 100MΩ OR MORE
CONTACT RESISTANCE	: DC 2-4V 1A 20mΩ OR LESS
WITHSTAND VOLTAGE	: AC 1500V FOR 1 Min
AMBIENT TEMPERATURE	: 0 °C TO 85 °C
ELECTRICAL LIFE	: 10,000 CYCLES

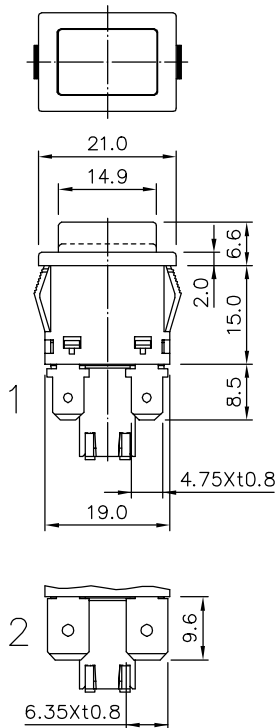


KNOB TYPE

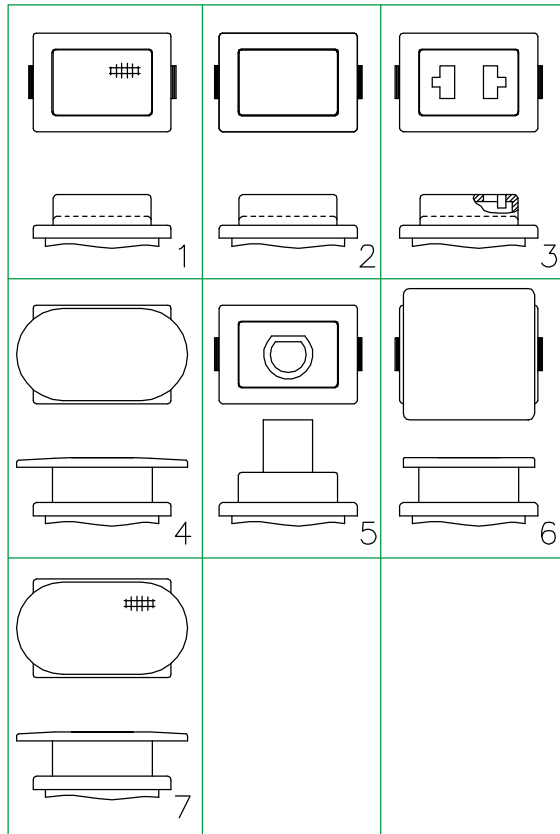

W	PANEL THICK
19.4	0.75 ~ 1.25
19.7	1.25 ~ 2.00
20.0	2.00 ~ 3.00

MOUNTING HOLE
(FOR REFERENCE)



SWITCH FUNCTION				APPROVAL
MODEL NO.			OPERATIONS	
8217	OFF	ON	SPST	
8217	OFF	ON	DPST	
8217	OFF	(ON)	SPST	
8217	OFF	(ON)	DPST	

TERMINAL'S TYPE	
1	QUICK TERMINAL
2	QUICK TERMINAL